


Master Switch For One Nu-Crank To Control One Additional Window

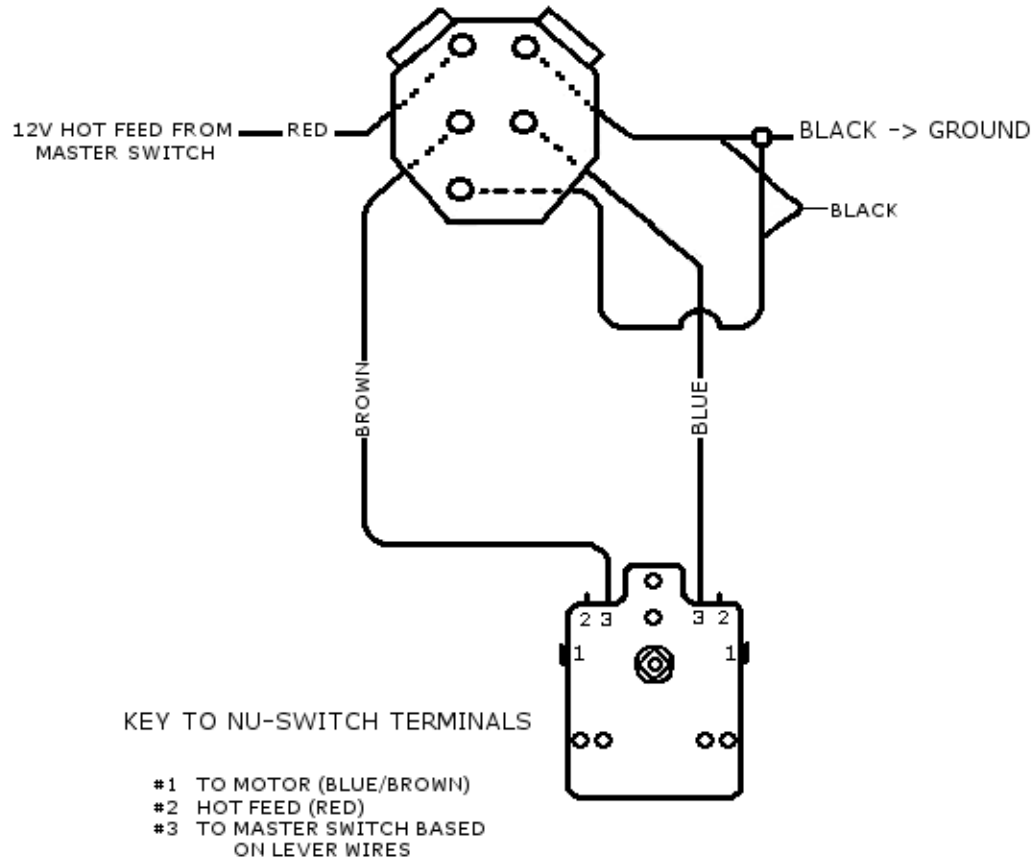

Wiring Instructions for a Single Master Switch for Nu-Cranks

Note: Prior to installation, test the direction of the power window regulators for correct travel. It is easier to correct the travel direction prior to final installation. Review the notes for correcting the up/down travel below.

Remove the ground wire (black) from the original Nu-Crank Wire Harness

Attach the 2 wires (blue [D]; brown [C]) from the master switch to terminals #3 on the micro switches. New terminals included.

Attach Hot Feed (red) from the Master Switch AND the Hot Feeds (red) from Nu-Crank to a 12V Hot Source

Attach the motor wires (blue/brown) from the Nu-Crank Switch to the motor.

Ground the Master Switch

Correcting the up/down travel:

If a regulator is going the wrong direction from the Nu-Crank Switch – reverse the two wires at the motor plug. Special sheet included

If a regulator is going in the wrong direction from the Master Switch – reverse the two wires attached to terminals #3.